


# Shellac-based encapsulation model incorporating calcium fluoride for oral care applications


## Supplementary File

**Table S1.** Fluid properties of NaF solution (F: 5,000 ppm)


Parameter	Value	Unit
Surface tension ( $\gamma$ )	0.072	N/m
Density of solution ( $\rho$ )	1,000	kg/m <sup>3</sup>
Acceleration due to gravity	9.81	m/s <sup>2</sup>

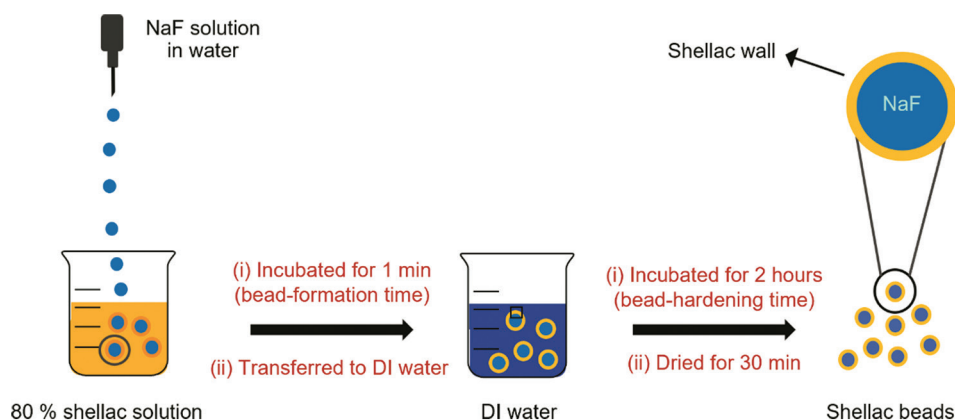


**Figure S1.** Schematic illustration detailing the synthesis steps for producing shellac beads via the extrusion method. Abbreviation: DI: Deionized.

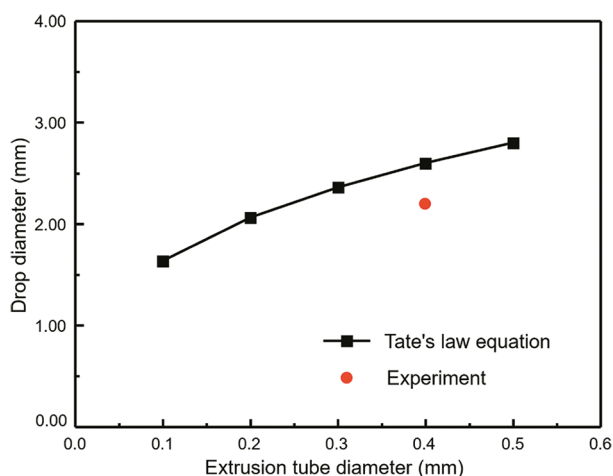


**Figure S2.** Drop diameter estimation for NaF solution via Tate's law across varied extrusion tube diameters (0.1–0.5 mm), with comparison to experimental data (0.4 mm tube).

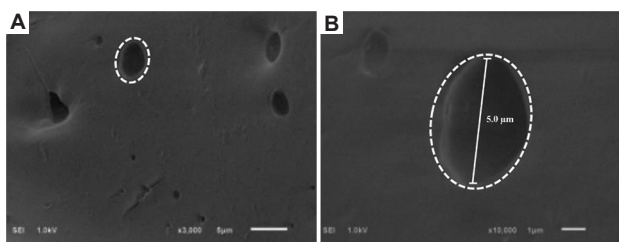


**Figure S3.** Scanning electron microscopy images of bead surfaces prepared using 70% ethanolic shellac solutions at magnifications of (A)  $\times 3,000$  (scale bar:  $5\ \mu\text{m}$ ) and (B)  $\times 10,000$  (scale bar:  $1\ \mu\text{m}$ ), with dashed circles indicating the positions of holes.

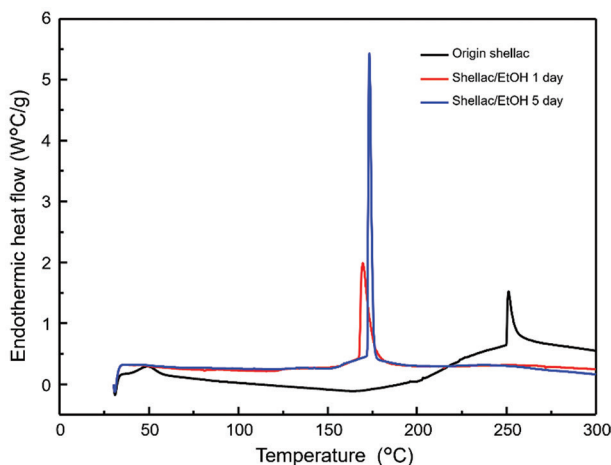

**Figure S4.** Differential scanning calorimetry thermograms comparing original shellac with shellac dissolved in ethanol for 1 and 5 days.

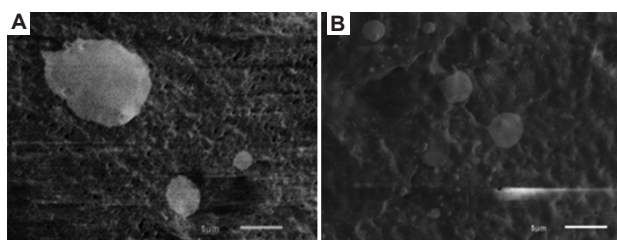

**Figure S5.** SEM images of shellac-bead surfaces showing  $\text{CaF}_2$  deposition after soaking in  $\text{CaCl}_2$  at (A) 2.5 % w/w and (B) 5.0 % w/w. Both figures A and B at magnifications of  $\times 3,000$  (scale bar:  $5\ \mu\text{m}$ ).

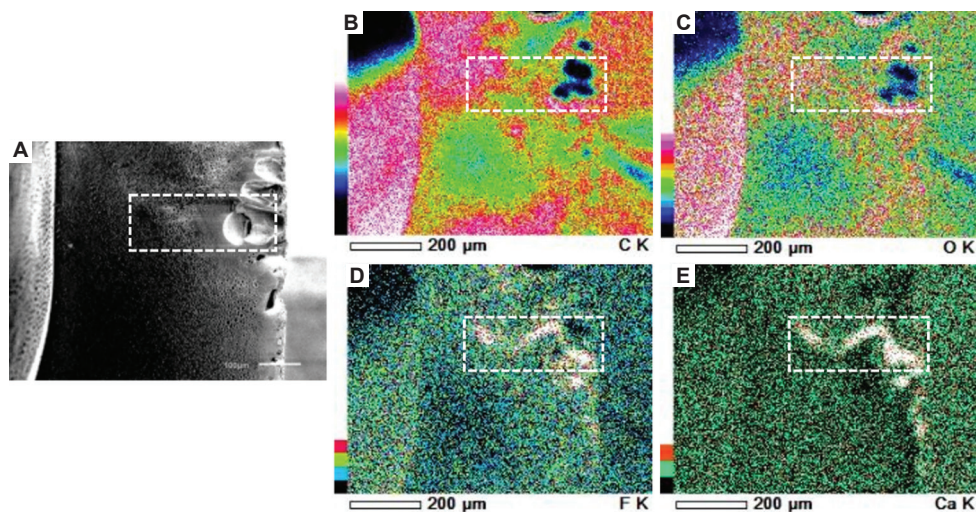

**Figure S6.** The tubular defects in the shellac wall contain  $\text{CaF}_2$  inside. (A) Scanning electron microscopy image (Scale bars:  $100\ \mu\text{m}$ ; magnification:  $\times 100$ ) and (B-E) Energy-dispersive X-ray spectroscopy (EDS) maps of C, O, F, and Ca, respectively, showing the cross-section of a shellac bead with  $\text{CaF}_2$ , demonstrating a tubular structure. C K, O K, F K, and Ca K refer to  $K\alpha$  emission lines detected through EDS mapping.